


NOTE : LHR-RHR (exterior swing) shown. For interior swing, specify LH-RH.

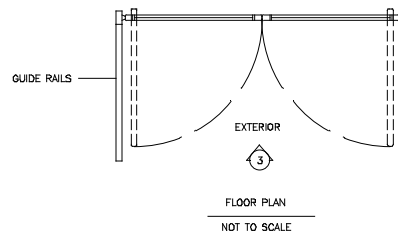

NOTE  
Rough opening should allow  
for 1/4" (5) minimum shim  
at jambs and header.

File 4.057d1  
Horton Series 4500  
Complete Door/Overhead Concealed Operator  
Package