

# 4" No Touch Switch

## S-4x4-NOTOUCH-US32D

Phone: 877.421.9490  
Fax: 877.421.3158  
customerservice@wikk.com



### Specification Summary

The switches to be used throughout the complex shall be Wikk® Industries Inc. 4x4 No Touch ( 4.5" X 4.5") switches, and shall be ADA complaint. Faceplates shall be constructed 18GA 304 Stainless Steel.

#### Features:


- Uses IR technology, Device is active with a simple wave of the hand
- Ideal for sanitary applications
- Dual LED illuminated sensor, Red/Green indicates Inactive/Active status

#### Mounting Options:

##### Surface Mount:

Double Gang Box

**No Touch Switches cannot be wireless  
Hard-Wired only  
Interior use only**

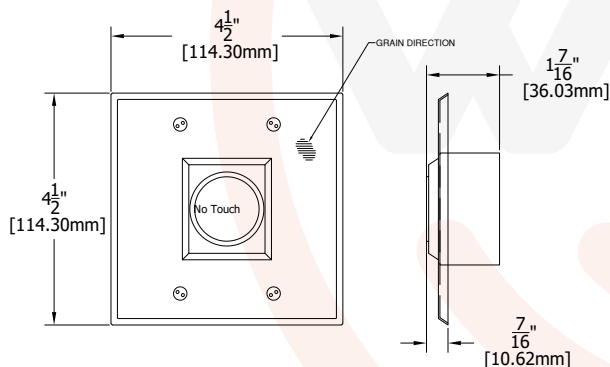

**Overall Dimensions:** 4.5" W x 4.5" H x 1.42" Deep  
(114mm x 114mm x 36mm)

Input 25mA (Standby), 55mA (Active) at 12/24 VDC  
Output 2-spdt, 3 AMP Dry Contact  
Activation Time 1 second or as long as sensor is triggered  
Range 4"  
Temp. Rated -4°F to 131°F

For custom quote request, contact [customerservice@wikk.com](mailto:customerservice@wikk.com)