



D2107V to D2118V

IP VIDEO DOOR STATION

For apartment buildings and businesses, 7 to 18 call buttons

STAY HOME WHILE AWAY.



ADVANTAGES

HOW DOES IT WORK?

Imagine, you are not at home and your children have locked themselves out or the courier wants to deliver a parcel. With DoorBird this is no longer a problem. Every time someone rings the doorbell you will get a push notification on your smartphone or tablet. Via the DoorBird App you can talk to visitors and also see them live in HD quality. You will never miss a visitor again. With DoorBird you are on the move and yet at home, even if a burglar rings at the door to check if someone is at home.

SMART HOME STARTS AT THE FRONT DOOR

DoorBird is the smart solution for your house entrance. Simply connect your DoorBird IP Video Door Station to your smartphone and talk to your visitor - anywhere you are. The IP Video Door Station can be used as a stand-alone unit or can be integrated into an existing Smart Home platform. Even existing classic installations such as an electric door opener can still be used and controlled via the DoorBird App.

QUALITY MADE IN GERMANY

All DoorBird products are designed, developed and produced by Bird Home Automation Group in Berlin, Germany. We manufacture all products with the greatest care and precision, and deliver them to our customers all over the world.



Open API

- Local interface for integration with third-party systems and SIP



Video and audio call

- On smartphones, tablets (iOS, Android), IP and landline phones (SIP)



Smart Transmission Mode (STM)

- Real-time audio / video communication, optimized for mobile devices via WiFi, 3G, 4G, 5G



Smart Home & NVR compatible

- Control4, Loxone, Crestron, Synology, AVM FRITZ!Fon, URC, QNAP, RTI, ELAN, Fibaro, Bang & Olufsen and others



Automatic door buzzer

- For use in medical offices and office environments

HD HDTV Video

- Ultra wide-angle, hemispheric lens, 180°

4D Motion sensor with 4D technology

- Distance up to 10 m adjustable via App (interval: 1 m)



Individual action schedules, e.g.:

- RFID key fob “abc” has only access on Wednesday from 9 am until 11 am
- 4D motion sensor switches on external lamp between 9 pm and 6 am



Light sensor

- For night vision mode



Call button

- With backlit nameplate
- Up to 18 call buttons



Microphone

- Clear voice transmission



Easy connection to the network

- Connection via a network cable or bell wire via 2-Wire Ethernet PoE Converter “DooBird A1071” (PoE, network data)



Geofencing

- Automatic door and gate opening when returning home



Noise reduction and echo cancellation (AEC, ANR)



Night vision

- With 12 Infrared LEDs



RFID reader

- Configurable remotely via App (e.g. time frame)



Two freely configurable bi-stable switching relays

- Two doors or gates can be controlled via App
- Status configurable via App: temporary or permanent circuit

GENERAL	
Front cover	3 mm (0.12 in) For further information on materials and colours see the materials table on the product page in the online shop.
Mounting	Flush or surface mount, Mounting backing case available separately
Call button	Illuminated
Name sign	Plastic Metal cover plate and engraving available separately, see www.doorbird.com/de/buy
Power supply	15 V DC (max. 15 W) or Power over Ethernet (PoE 802.3af Mode-A)
Connections	<ul style="list-style-type: none"> • RJ45, for LAN/PoE • Bistable self-latching relay #1, max. 24 V DC/AC, 1 Ampere, e.g. for electrical door opener • Bistable self-latching relay #2, max. 24 V DC/AC, 1 Ampere, e.g. for electrical door opener • External input for external door opening button • 15 V DC input (-/+), max. 15 W • Relay can be extended/replaced with DoorBird I/O Door Controller.
Protection class	IP65, IK08
Approvals	CE, FCC, IC, UKCA, RoHS, REACH, WEEE, IEC/EN 62368, IEC/EN 62471
Operating conditions	-25 °C to +55 °C / -13 °F to 131 °F Relative air humidity 10% to 85% (non-condensing)
Scope of delivery	1x main electrical unit 1x front cover 1x RFID key fob 1x screwdriver 1x quick-start guide with Digital Passport 1x installation manual 1x set of hardware
Warranty	See www.doorbird.com/de/warranty

CURRENT SYSTEM REQUIREMENTS	
System requirements	<p>Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet</p> <p>Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fiber optic, no socks or proxy server</p> <p>Network: Ethernet Network, with DHCP</p> <p>Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.</p>

VIDEO	
Camera	HDTV 720p, dynamic (VGA – HDTV)
Lens	High-end ultra wide-angle hemispheric lens 180° (D), 140° (H), 100° (V), straightened, IR-capable
Night-vision	Yes, light sensor, automatic IR-cut filter, 12 Infrared LEDs (850 nm)

AUDIO	
Audio components	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC)
Audio streaming	Two-way, full duplex

NETWORK	
Ethernet	RJ45 jack, PoE 802.3af Mode-A, 10/100 Base-T
Supported protocols	HTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP, SIP, DTMF (RTP [RFC-2833], SIP INFO [RFC-2976]), STM

MOTION SENSOR	
Type	Active
Detection angle	54° (H), 70° (V)
Range	1 - 10 m (3.3 - 32.9 ft), depends on environment, configurable in 1 m (3.3 ft) steps.
Technology	4D. Based on multiple integrated sensors and algorithms, e.g. Radio Frequency Energy (RFE)
Configuration	<p>Via App, e.g.</p> <ul style="list-style-type: none"> • Range (1 - 10 m / 3.3 - 32.9 ft) • Movement direction (coming, leaving, both) • Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification) • Individual schedules

RFID	
Type	Active Reader Passive Tag (ARPT) system
Standard	ISO/IEC 18000-2:2009 Part 2, EM4100, EM4102
Frequency	125 KHz
Range	0 - 3 cm, depends on environment
Antenna	Internal
Compatible Transponder	RFID key fobs, sold separately, see www.doorbird.com/buy
Configuration	<p>Up to 500 tags manageable</p> <p>Via App, e.g.</p> <ul style="list-style-type: none"> • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules • RFID history available for 60 minutes in the app

INTEGRATED WIRELESS MODULES	
RFID	125 KHz
Sensor	24 GHz, can be disabled

THIRD-PARTY INTEGRATION (DOORBIRD CONNECT)	
Partnerintegrations	see www.doorbird.com/connect
API	see www.doorbird.com/api
Simultaneous video streams	One, for event-based and continuous recording


OPTIONAL ACCESSORIES	
Sold separately	<ul style="list-style-type: none"> • Power supply unit (mains adaptor) with 4 country-specific outlet adaptors (110 - 240 V AC to 15 V DC) – EAN 4260423867314 • Surface-mounting housing, flush-mounting housing, Protective-Hood • See www.doorbird.com/buy

Please note:
Installation requires technical knowledge or a professional.

DIMENSIONS

FLUSH-MOUNTED VERSIONS


Model	Number of call buttons	Front cover		Casing		
		Width	Height	Width	Height	Depth
D2107V	7	220 mm	283,2 mm	196 mm	256 mm	45 mm
D2108V	8	8.67 in	11.15 in	7.72	10.08 in	1.78 in
D2109V	9	220 mm	343,6 mm	196 mm	316,5 mm	45 mm
		8.67 in	13.53 in	7.72	12.47	1.78 in
D2110V	10	220 mm	283,2 mm	196 mm	256 mm	45 mm
		8.67 in	11.15 in	7.72	10.08 in	1.78 in
D2111V	11					
D2112V	12	220 mm	343,6 mm	196 mm	316,5 mm	45 mm
D2113V	13	8.67 in	13.53 in	7.72	12.47	1.78 in
D2114V	14					
D2115V	15					
D2116V	16	220 mm	404 mm	196 mm	377 mm	45 mm
D2117V	17	8.67 in	15.91 in	7.72	14.85 in	1.78 in
D2118V	18					

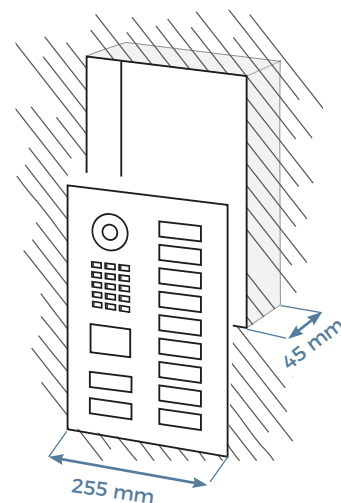

Front cover material thickness:
3.0 mm (0.12 in)

SURFACE-MOUNTED VERSIONS

Model	Number of call buttons	Front cover		Casing		
		Width	Height	Width	Height	Depth
D2107V	7	220 mm	283,2 mm	216 mm	279 mm	45,75 mm
D2108V	8	8.67 in	11.15 in	8.50 in	10.98 in	1.80 in
D2109V	9	220 mm	343,6 mm	216 mm	339,5 mm	45,75 mm
		8.67 in	13.53 in	8.50 in	13.37 mm	1.80 in
D2110V	10	220 mm	283,2 mm	216 mm	279 mm	45,75 mm
		8.67 in	11.15 in	8.50 in	10.98 in	1.80 in
D2111V	11					
D2112V	12	220 mm	343,6 mm	216 mm	339,5 mm	45,75 mm
D2113V	13	8.67 in	13.53 in	8.50 in	13.37 mm	1.80 in
D2114V	14					
D2115V	15					
D2116V	16	220 mm	404 mm	216 mm	400 mm	45,75 mm
D2117V	17	8.67 in	15.91 in	8.50 in	15.75 in	1.80 in
D2118V	18					

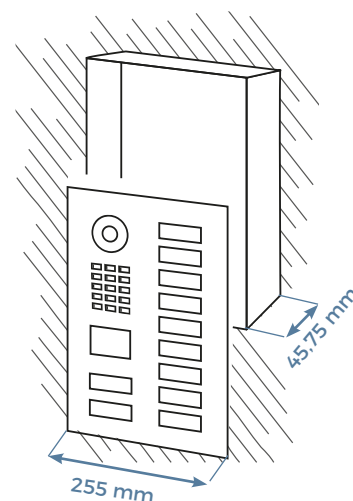

Front cover material thickness:
3.0 mm (0.12 in)